

## PMD Series 15" Industrial Display

Model NO :PMD-150XN-VX



### Display Specifications

LCD Display	15" Active Matrix TFT color LCD IP65 Front Panel Protection
Active Display Area	304.128(H) x 228.096(V) mm
Resolution	1024 x 768
Pixels Pitch	0.297 x 0.297 mm
Brightness [ cd/m <sup>2</sup> ]	250 (Typ)
Contrast Ration	700 : 1(Typ.)
Viewing Angle	170° (H) / 160°(V)

### System

I/O Connectors	DC power input x 1 , VGA (15 Pin Female D-SUB) x 1
OSD Control	on the front Side

### Power Supply

Power Consumption	30 (watt)
Power Input	DC 12 V

### Mechanical

Construction	Aluminum front side and metal housing
Mounting	Panel Mount or VESA Mount ( 75 x 75 mm)
Dimension	400 x 300 x 41.5 (mm)
Net Weight	3.90 KGS

### Environmental

Operating Temperature	0~50°C ( 32 ~122 °F )
-----------------------	-----------------------


### Order Options

Optional DVI Input	Yes
Optional Touch Panel	Resistive, Capacitive (RS232 or USB)


### Ordering Information:

PMD-150XN-VX	15" Industrial Display Aluminmu front bezel and IP65 front side protection
PMD-150TN-VX	15" Industrial Display Aluminmu front bezel and IP65 front side protection with touch screen

### Dimension

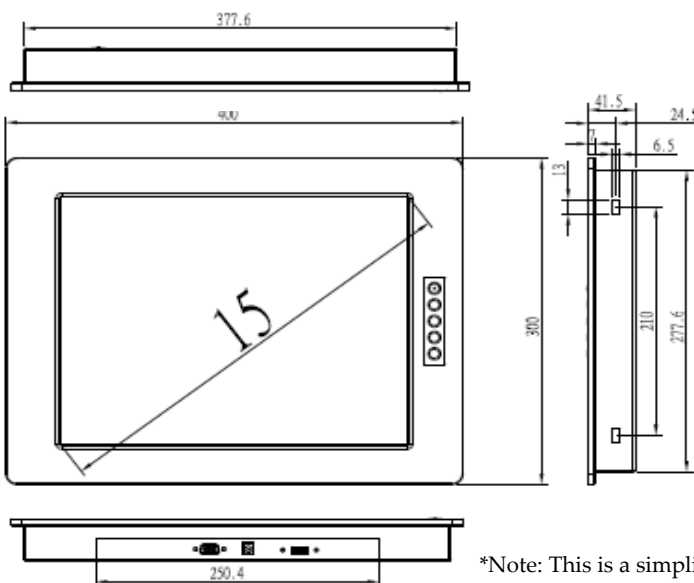

UNIT: mm

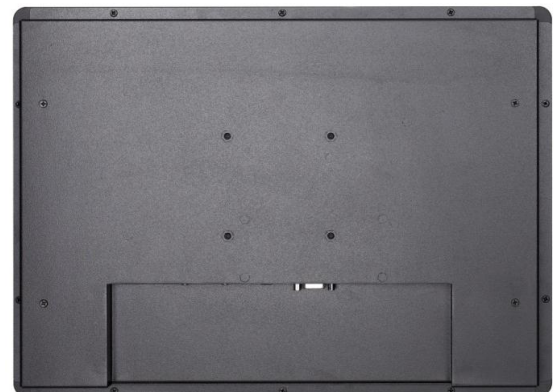

\*Note: This is a simplified drawing and some components are not marked in detail. Please contact us for product detail information.