

## BID Series

### 19" Front Panel IP 65 Solution

Model NO : BID-190XN-VX



Open Frame + Bezel  
 Compact & Sleek Design

#### Display Specifications

LCD Display	19" Active Matrix TFT color LCD IP65 Front Panel Protection
Active Display Area	376.32(H) x 301.06(V) mm
Resolution	1280 x 1024
Pixels Pitch	0.098*RGB(H) mm x 0.294 mm
Brightness [ cd/m <sup>2</sup> ]	250 (Typ)
Contrast Ratio	800 : 1(Typ.)
Viewing Angle	170° (H) / 160°(V)

#### System

I/O Connectors	DC power input x 1 , VGA (15 Pin Female D-SUB) x 1
OSD Control	on the Rear Side

#### Power Supply

Power Consumption	35 (watt)
Power Input	DC 12 V

#### Mechanical

Construction	Metal Chassis
Mounting	VESA Mount or Rear Mount (VESA 100 x100 mm)
Dimension	450 x 350 x 42.5 mm
Net Weight	TBD

#### Environmental

Operating Temperature	0~50°C ( 32 ~122 °F )
-----------------------	-----------------------

#### Order Options



Optional DVI Input	Yes
Optional Touch Panel	Resistive, Capacitive (RS232 or USB)

#### Ordering Information

BID-190XN-VX	19" Industrial Display , Front Panel IP65 Solution
BID-190TN-VX	19" Industrial Display , Front Panel IP65 Solution with Resistive Touch Screen
BID-190CN-VX	19" Industrial Display , Front Panel IP65 Solution with Capacitive Touch Screen

#### Dimension

UNIT: mm

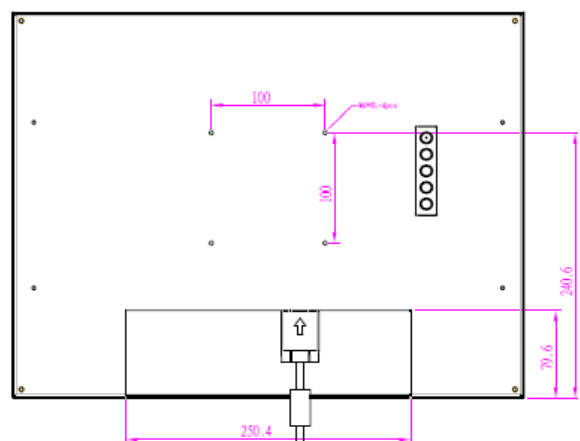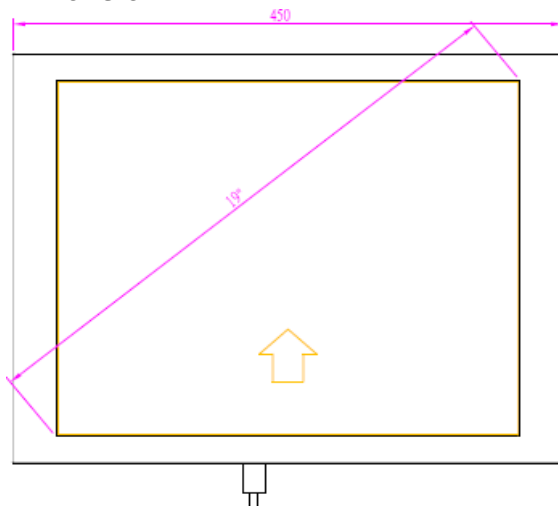

\*Note: This is a simplified drawing and some components are not marked in detail.

Please contact us for product detail information.