

# Flat Touch monitor

Thin profile , rounded corners , bezel -less



## Features :


- \* 15" VGA 1024 x 768 LCD panel with LED backlight for power saving and environmental protection
- \* 0°C ~ 50°C range operating temperature
- \* PCAP touchscreen
- \* Multi-touch PCT touchscreen with USB interface
- \* Flexible signal interface: VGA, DVI
- \* VESA mounting
- \* IP65 front panel compliant
- \* True flat surface
- \* 9~36Vdc Power in

**Model No :FAD series**



## Main Specifications

Display	Model	FAD-150PW-DN
	Size	15" LED Panel
	Resolution	1024 x 768 ( XGA)
	Viewing Angle	80° /80° (H), 70° /80° (V)
	Brightness	350 ( cd/m <sup>2</sup> )
	Support color	16.2M colors
	Contrast ratio	800:1
	Response time	8 msec
Touchscreen	Backlight life( hrs )	50,000 hrs
	Touchscreen type	PCT Multi-touch touchscreen
	Surface Hardness	≥6H
Environment	Transparency	>85%
	Operating Temperature	0 ~ 50°C( 32~122° F)
Mechanical	Storage Temperature	-20~60°C(-4~140° F)
	Construction	Metal chassis with Aluminum profile
	Mounting	VESA mounting
	Dimension	361.2 x 285.2 x 285.2 (mm)
System	Net Weight	4.10kgs
	I/O	VGA x 1,DVI x 1 ,USB x 1 for Touch ,phoenix connector x 1 for DC power in
	Power input	9~36Vdc in ,
	Power Consumption	14.5Watt
Accessories	EMC compliance	CE/FCC
	Optional Items	VGA cable x 1 , USB cable x 1 , Phoenix male connector x 1
Optional Items		DVI cable ( 1.5 m )

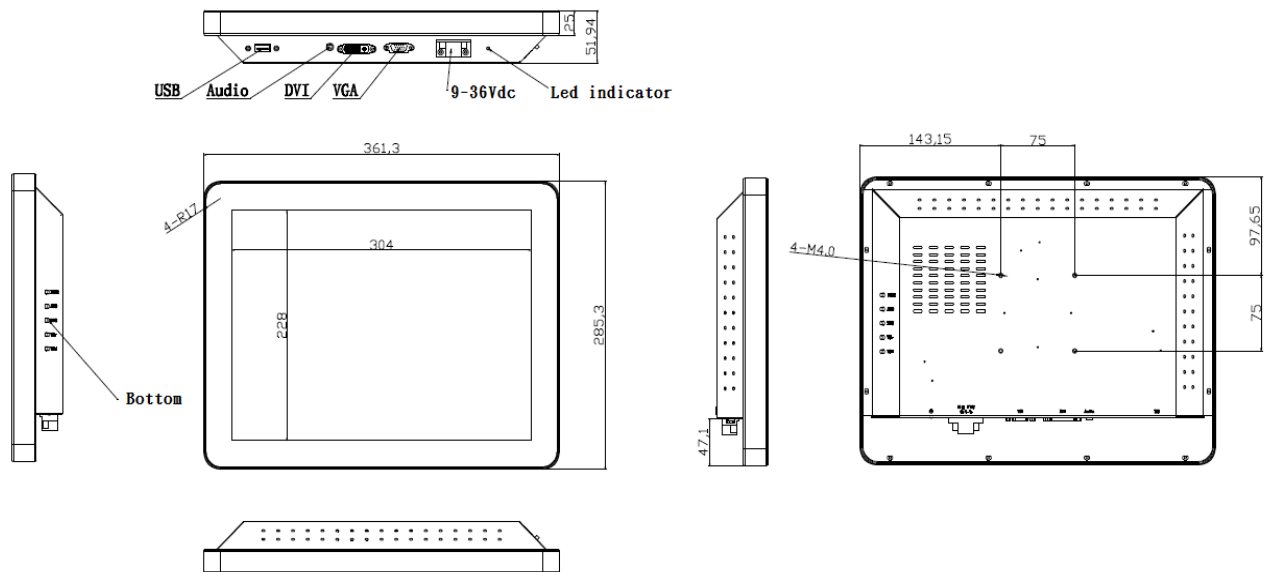

\*Note: This is a simplified drawing and some components are not marked in detail. Please contact us for product detail information.